

AMS Snap Lock

The **AMS Snap Lock** is our most commonly specified standing seam panel. This panel offers both superior structural panel performance while maintaining architectural aesthetics, making it a perfect choice for your commercial, industrial, institutional and residential needs.



MATERIALS

- Galvanized
- Zinalume Plus
- Aluminum
- Stainless Steel
- Terne Coated Steel
- Cold Rolled Steel
- Copper

TESTING

- UL-580 Class 90 Wind
- UL-790 Class A Fire Rated
- ASTM 1592
- ASTM E331/
1646 Water Infiltration
- ASTM E283/1680 Air Infiltration
- ASTM G-23 Type EH Accelerated

Weathering

- ASTM 2274 Humidity Resistance
- ASTM B 117 Salt Spray Resistance
- ASTM D 1808 Chemical/Acid

Pollution Resistance

- ASTM D 3363 Hardness
- ASTM D 2794 Impact Resistance

SMOOTH OR STUCCO EMBOSSED




MATERIALS FORMED

- Galvanized 30 Ga.-22 Ga.
- Zinalume 30 Ga.-22 Ga.
- Aluminum .019 - .040
- Copper 16oz. - 20oz.

FINISHES

- 53 Kynar Painted Colors
- 33 SMP Colors
- 25 Polyester Colors
- Custom Colors

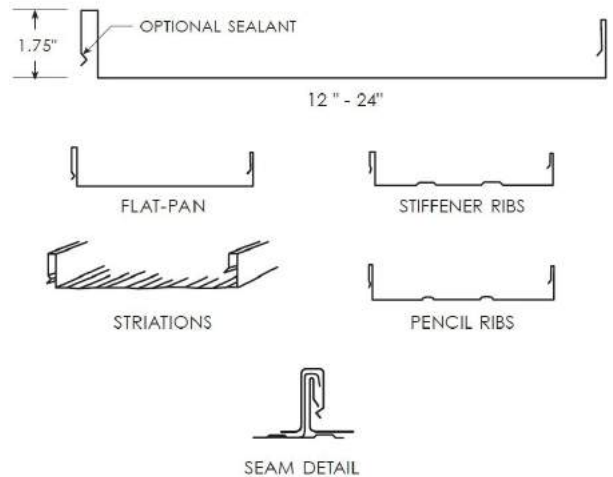

The AMS Snap Lock panel offers a variety of features perfect for your architectural projects. It has a 1.75" leg height and can be produced in continuous lengths. The continuous interlocking seam allows for increased structural performance and wind/water resistance. This panel also incorporates a concealed fastener clip that removes the need for exposed fasteners and allows for thermal expansion and contraction. AMS Snap Lock can be installed over open framing, solid substrates or rigid insulation. This panel is optimal for roofing, mansard, fascia and even sidewalls. It is backed by a 20 - 40 year paint system warranty. We also offer optional weathertightness warranties in both side lap and full system up to 20 years.



THE BASIS OF DESIGN

www.ams-wa.com | 877.950.0005

©2016 AMS